


PM02071 Security Plug Removal

IN THIS GUIDE YOU WILL BE SHOWN HOW TO REMOVE THE PM02071 TO ALLOW THE USE OF VERTICAL POSITION BEZELS.

YOU WILL REQUIRE A FLAT HEAD SCREWDRIVER / SLOTTED SCREWDRIVER. *PICTURED BELOW*

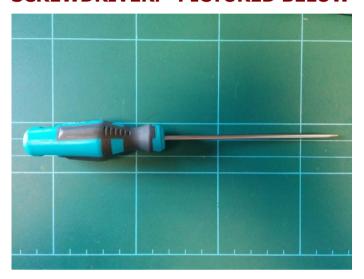

PM2071 Security plug installed in a NV9USB.



Please follow the instructions below to remove the Security Plug.

1 Push in between the grey and black plastic try to aim for the centre of the plug like in the picture below. Please be aware it may require a little force to make the screwdriver to slip between the Plug and NV9USB.



1 LEAVER THE SCREWDRIVER OVER UNTIL THE PLUG HAS LIFTED. IT WILL POP OUT OF PLACE.





3 ONCE IT HAS LIFTED IT CAN BE REMOVED BY HAND.



